



Surface Mount TRANSZORB® Transient Voltage Suppressors



RoHS
COMPLIANT
HALOGEN
FREE

FEATURES

- Very low profile - typical height of 0.95 mm
- Ideal for automated placement
- Uni-directional only
- Excellent clamping capability
- Peak pulse power:
 - 600 W (10/1000 μ s)
 - 4 kW (8/20 μ s)
- ESD capability: IEC 61000-4-2 level 4
 - 15 kV (air)
 - 8 kV (contact)
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C
- Compliant to RoHS Directive 2002/95/EC and in accordance to WEEE 2002/96/EC
- **Halogen-free according to IEC 61249-2-21 definition**

PRIMARY CHARACTERISTICS

V_{WM}	5.0 V to 20 V
P_{PPM} (10 x 1000 μ s)	600 W
P_{PPM} (8 x 20 μ s)	4000 W
P_D at $T_M = 55$ °C	6 W
T_J max.	175 °C

TYPICAL APPLICATIONS

Use in sensitive electronics protection against voltage transients induced by inductive load switching and lighting on ICs, MOSFET, signal lines of sensor units for consumer, computer, industrial, and telecommunication.

MECHANICAL DATA

Case: DO-221AC (SlimSMA)

Molding compound meets UL 94 V-0 flammability rating
Base P/N-M3 - halogen-free, RoHS compliant, and commercial grade

Terminals: Matte tin plated leads, solderable per J-STD-002 and JESD22-B102

M3 suffix meets JESD 201 class 1A whisker test

Polarity: Color band denotes cathode end

MAXIMUM RATINGS ($T_A = 25$ °C, unless otherwise noted)

PARAMETER	SYMBOL	VALUE	UNIT	
Peak pulse power dissipation	with a 10/1000 μ s waveform	$P_{PPM}^{(1)}$	600	W
	with a 8/20 μ s waveform		4000	
Peak pulse current	with a 10/1000 μ s waveform	$I_{PPM}^{(1)}$	See next table	A
	with a 8/20 μ s waveform			
Power dissipation	$T_M = 55$ °C	$P_D^{(2)}$	6	W
	$T_A = 25$ °C	$P_D^{(3)}$	1.0	
Storage temperature range	T_{STG}	- 65 to + 175	°C	
Operating junction temperature range	T_J	- 55 to + 175		

Notes


- (1) Non-repetitive current pulse, per fig. 3 and derated above $T_A = 25$ °C per fig. 2.
- (2) Power dissipation mounted on infinite heatsink
- (3) Power dissipation mounted on minimum recommended pad layout



SMA6F5.0A thru SMA6F20A

Vishay General Semiconductor

ELECTRICAL CHARACTERISTICS	
SYMBOL	PARAMETER
V_{WM}	Stand-off voltage
V_{BR}	Breakdown voltage
V_C	Clamping voltage
I_D	Leakage current at V_{WM}
I_{PP}	Peak pulse current
αT	Voltage temperature coefficient
V_F	Forward voltage drop
R_D	Dynamic resistance

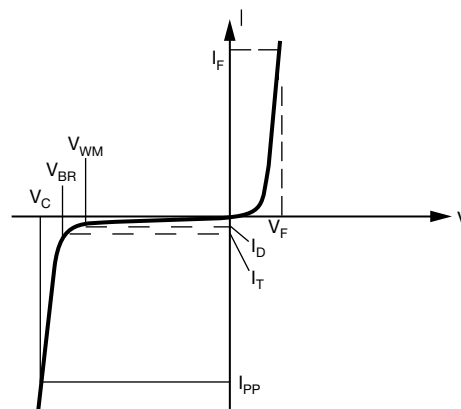

Zener Voltage Regulator

ELECTRICAL CHARACTERISTICS ($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)

DEVICE TYPE	DEVICE MARKING CODE	BREAKDOWN VOLTAGE V_{BR} AT I_T (1)			MAXIMUM REVERSE LEAKAGE I_D AT V_{WM} (3)			V_C AT I_{PP}		R_D (2)	V_C AT I_{PP}		R_D (2)	αT (3)	
		MIN.	MAX.		25 °C	85 °C		10/1000 μs			8/20 μs				
								MAX.			MAX.				
		V			mA			MAX.			MAX.		MAX.		
		V			μA			V	V	A	Ω	V	A	Ω	$10^{-4}/^\circ\text{C}$
SMA6F5.0A	6AE	6.40	7.07	10	150	375	5.0	9.2	68.0	0.031	13.4	298	0.021	5.7	
SMA6F6.0A	6AG	6.70	7.41	10	600	1500	6.0	9.5	63.2	0.033	13.7	290	0.022	5.9	
SMA6F6.5A	6AK	7.20	7.96	10	100	250	6.5	10.2	58.8	0.038	14.5	276	0.024	6.1	
SMA6F7.5A	6AP	8.33	9.21	1	50	125	7.5	11.8	50.8	0.051	17.0	235	0.033	6.5	
SMA6F8.0A	6AR	8.89	9.83	1	20	50	8.0	12.8	46.9	0.063	18.2	220	0.038	7.0	
SMA6F8.5A	6AT	9.4	10.4	1	20	50	8.5	13.3	45.1	0.064	18.7	205	0.040	7.3	
SMA6F10A	6AX	11.1	12.3	1	1.0	5.0	10	15.7	38.2	0.089	19.6	184	0.040	7.8	
SMA6F11A	6AZ	12.2	13.5	1	1.0	5.0	11	17.2	34.8	0.107	21.5	172	0.047	8.1	
SMA6F12A	6BE	13.3	14.7	1	0.2	1.0	12	18.8	31.9	0.128	23.5	157	0.056	8.3	
SMA6F12AHD	6BF	13.2	14.3	1	0.2	1.0	12	18.5	32.4	0.130	22.9	157	0.055	8.4	
SMA6F13A	6BG	14.4	15.9	1	0.2	1.0	13	20.4	29.4	0.153	23.9	147	0.064	8.4	
SMA6F15A	6BM	16.7	18.5	1	0.2	1.0	15	23.6	25.4	0.201	27.7	123	0.075	8.8	
SMA6F16A	6BP	17.8	19.7	1	0.2	1.0	16	25.2	23.8	0.229	29.5	119	0.082	8.8	
SMA6F17A	6BR	18.9	20.9	1	0.2	1.0	17	26.7	22.5	0.259	31.4	111	0.095	9.0	
SMA6F18A	6BT	20.0	22.1	1	0.2	1.0	18	28.3	21.2	0.292	33.2	102	0.109	9.2	
SMA6F20A	6BV	22.2	24.5	1	0.2	1.0	20	31.4	19.1	0.361	36.8	93	0.132	9.4	

Notes

- (1) Pulse test: $t_p \leq 50\text{ ms}$
- (2) To calculate maximum clamping voltage at other surge currents, use following formula: $V_{CL\text{ max.}} = R_D \times I_{PP} + V_{BR\text{ max.}}$
- (3) To calculate V_{BR} vs. junction temperature, use following formula: V_{BR} at $T_J = V_{BR}$ at $25\text{ }^\circ\text{C} \times (1 + \alpha T \times (T_J - 25))$

THERMAL CHARACTERISTICS ($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	VALUE	UNIT
Typical thermal resistance, junction to ambient	$R_{\theta JA}$ (1)	150	$^\circ\text{C/W}$
Typical thermal resistance, junction to mount	$R_{\theta JM}$ (2)	20	$^\circ\text{C/W}$

Notes

- (1) Mounted on minimum recommended pad layout
- (2) Mounted on infinite heatsink



IMMUNITY TO STATIC ELECTRICAL DISCHARGE TO THE FOLLOWING STANDARDS

($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)

STANDARD	TEST TYPE	TEST CONDITIONS	SYMBOL	CLASS	VALUE
IEC 61000-4-2	Human body model (contact mode)	$C = 150\text{ pF}, R = 330\text{ }\Omega$	V_C	4	> 8 kV
	Human body model (air discharge mode)				> 15 kV

ORDERING INFORMATION (Example)

PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
SMA6F5.0A-M3/6A	0.032	6A	3500	7" diameter plastic tape and reel
SMA6F5.0A-M3/6B	0.032	6B	14 000	13" diameter plastic tape and reel

RATINGS AND CHARACTERISTICS CURVES

($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)

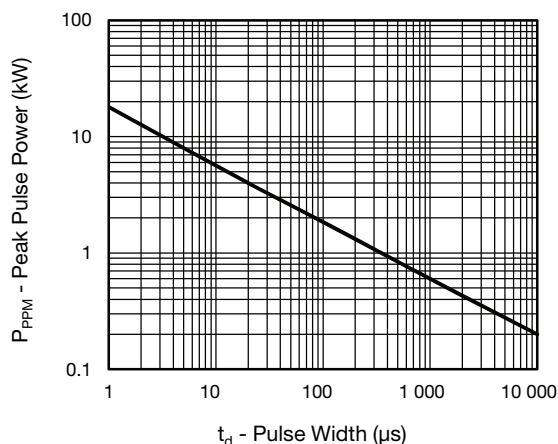


Fig. 1 - Peak Pulse Power Rating Curve

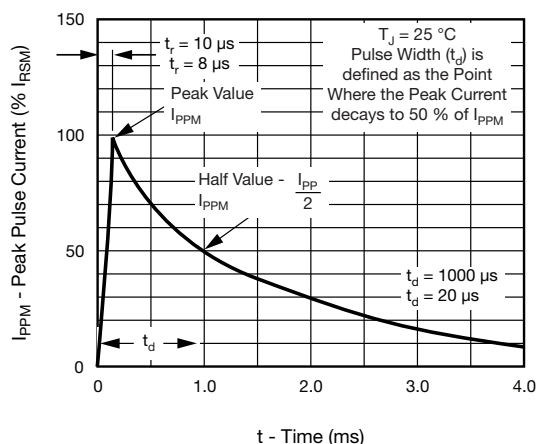


Fig. 3 - Pulse Waveform

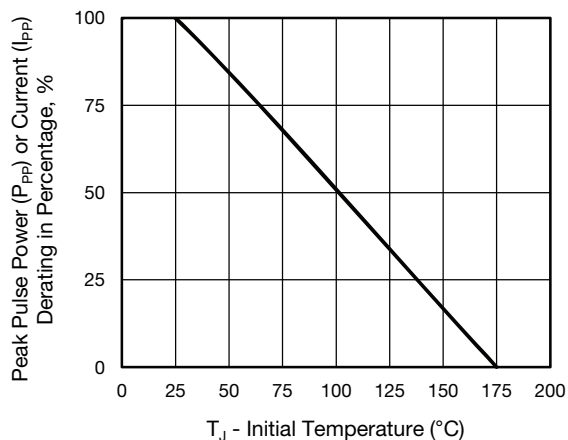


Fig. 2 - Pulse Power or Current vs. Initial Junction Temperature

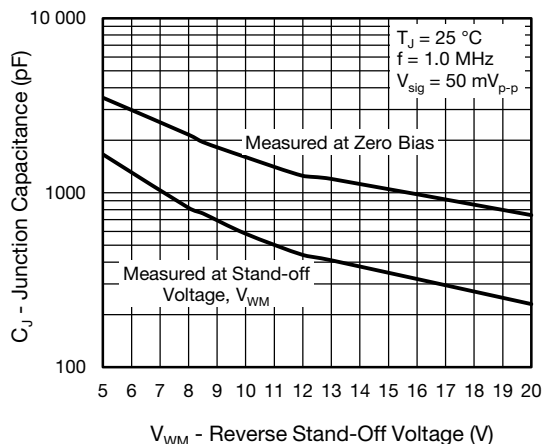


Fig. 4 - Typical Junction Capacitance

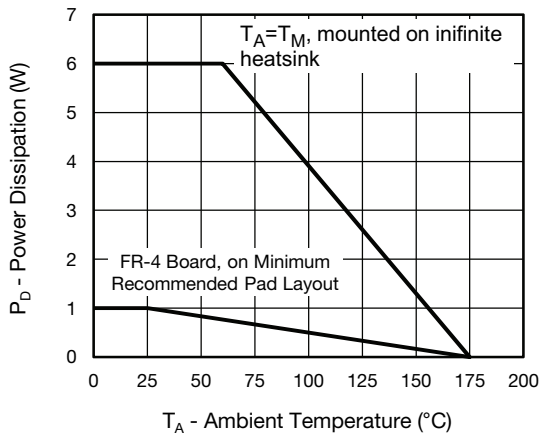


Fig. 5 - Power Dissipation Derating Curve


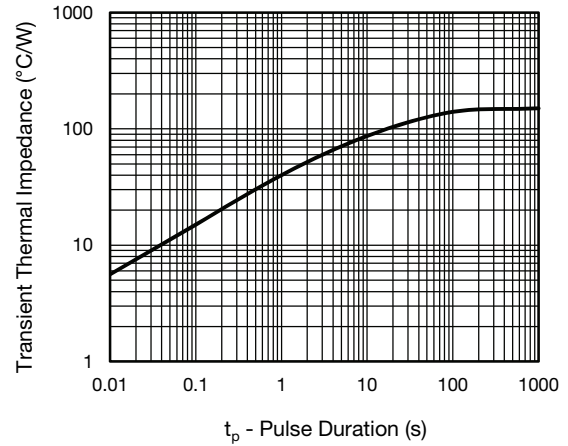


Fig. 6 - Typical Transient Thermal Impedance

PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

DO-221AC (SlimSMA)



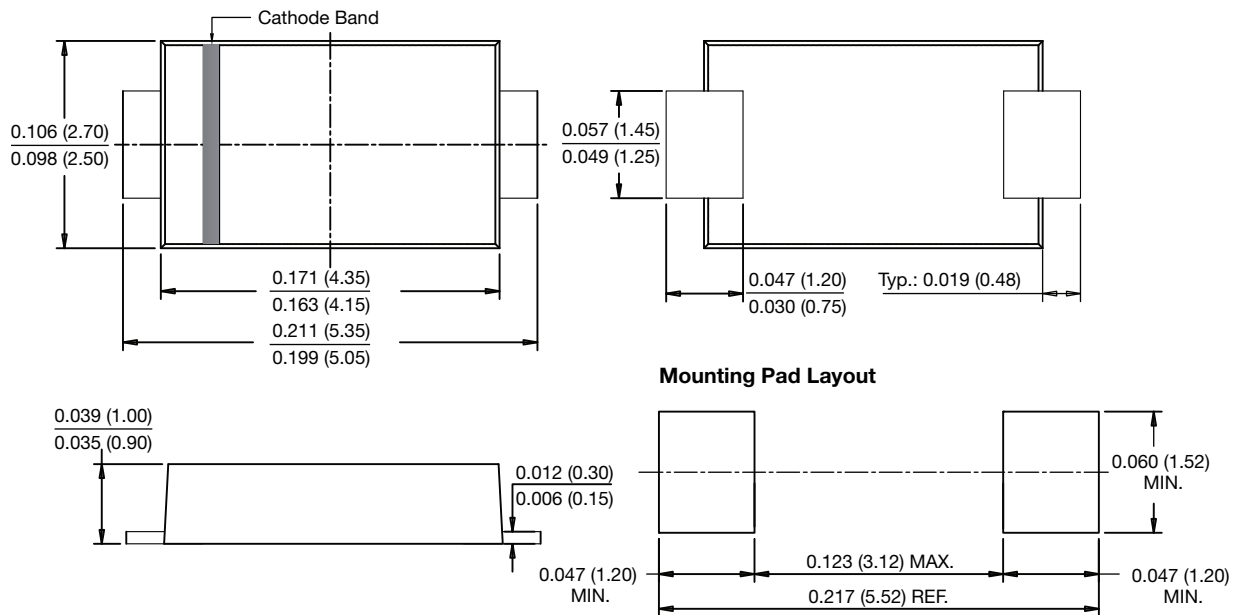

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.